

PunaPää Pläjäys 2024 2



Oil Pattern Distance:	42 Feet	Reverse Brush Drop:	36 Feet	Oil Per Board:	40 uL
Forward Oil Total:	10.48 mL	Reverse Oil Total:	10.36 mL	Volume Oil Total:	20.84 mL
Forward Boards Crossed:	262 Boards	Reverse Boards Crossed:	259 Boards	Total Boards Crossed:	521 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	2	18	74	0.0	2.5	2.5	2960
2	6L	6R	2	18	58	2.5	7.6	5.1	2320
3	8L	8R	1	18	25	7.6	10.1	2.5	1000
4	9L	9R	2	22	46	10.1	16.3	6.2	1840
5	10L	10R	2	26	42	16.3	23.6	7.3	1680
6	12L	12R	1	26	17	23.6	27.2	3.6	680
7	2L	2R	0	30	0	27.2	42.0	14.8	0

Conditioner:
Type In or Select
One

TransferType:
Type In or Select
One


Forward


Reverse


Combined


Buff


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	34.0	-8.0	0
2	12L	12R	2	22	34	34.0	27.8	-6.2	1360
3	10L	10R	4	18	84	27.8	17.6	-10.2	3360
4	7L	7R	4	14	108	17.6	9.7	-7.9	4320
5	4L	4R	1	14	33	9.7	7.8	-1.9	1320
6	2L	2R	0	14	0	7.8	0.0	-7.8	0

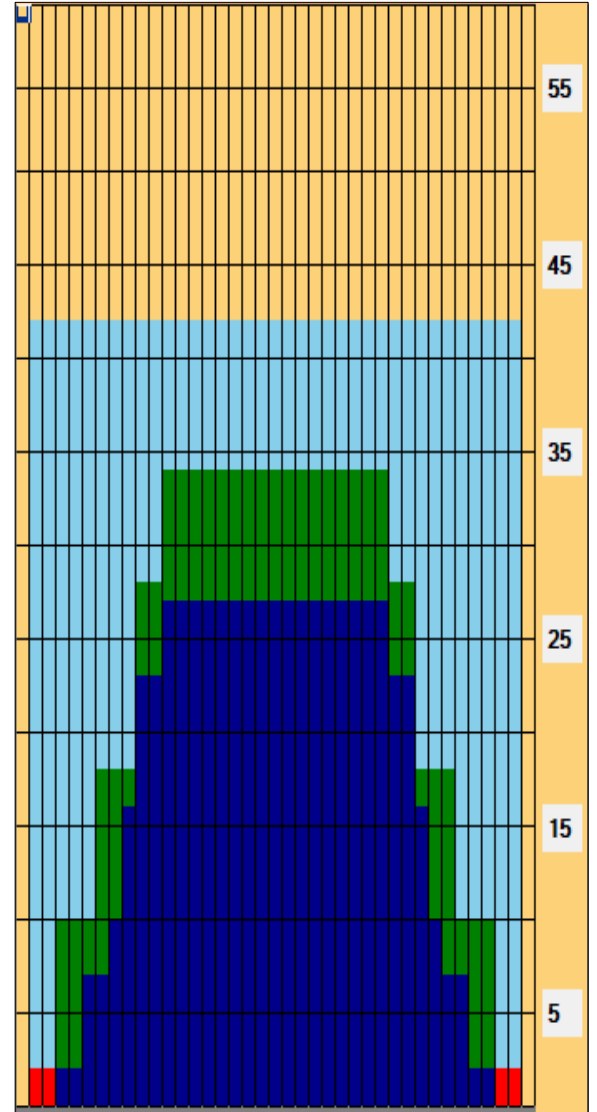

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	4.77	1.33	1	1	1.33	4.77

